LED Ceiling Fitting

INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 220-240V~50Hz supply in accordance with current IEE wiring regulations, and should be installed in accordance with local building regulations. It is for indoor use only, and is **not** suitable for a bathroom location.
- Before installing your light fitting always switch off the mains supply, and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation. Ensure that no one else has access that would enable the supply to be inadvertently reconnected.
- If the Class II, Double Insulated symbol is on the Light Fitting, then the Fitting does **not** require an Earth, and Live or Neutral **must not** be connected to Earth. If there is no such symbol the Fitting **must** be Earthed. The terminal blocks are supplied according to requirements of the fitting.
- This product contains non-replaceable LEDs. If the LEDs become damaged, they cannot be replaced, and the product must be scrapped.
- This product may contain delicate parts be careful during handling and maintenance to avoid breakage.
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.

Care Information

Allow 10 minutes to cool before replacing, adjusting or cleaning. Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Assembly/ User Instructions

Before you start

Please read these instructions carefully before fitting and retain for reference. Check the packaging and make sure that you have all the required parts. Follow each assembly step in order to prevent incorrect assembly. Ensure that the product is fully assembled as illustrated before use.

Please note - This instruction covers multiple fitting styles. While the assembly steps are the same, your product may vary from the diagram.

The Light pack contains:

Light fitting

Terminal connection block(s)

Fixing pack

Allen Key

The following tools may be required:

Selection of cross and flat head screwdrivers.

Electric drill and assorted drill bits.

Wire strippers.

Electrical insulation tape


These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician.

- 1. Decide on the position of the light fitting, or remove existing light fitting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface, preferably a wooden joist or joist bridge to support the weight of the light fitting.
- 2. Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B).
- 3. Attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.
- 4. Set the drop height of the product. This will be easier to complete before attaching the product to the ceiling. Push the cables into the ceiling cup by pressing button X until the desired length of the cables is reached. Any excess cable to be neatly stored in ceiling cup. Ensure the fitting will hang level.
- 5. Support your fitting and connect the house wiring to the terminal block see expanded wiring details below. **NOTE: This is a Class II fitting and must NOT be earthed.** Ensure no loose strands are left out of the connection block.




Assembly/ User Instructions

- 6. Secure the ceiling cup placing the slots (C) over the bracket by using the screws (B) removed in Point 2.
- 7. Turn on the power and test.

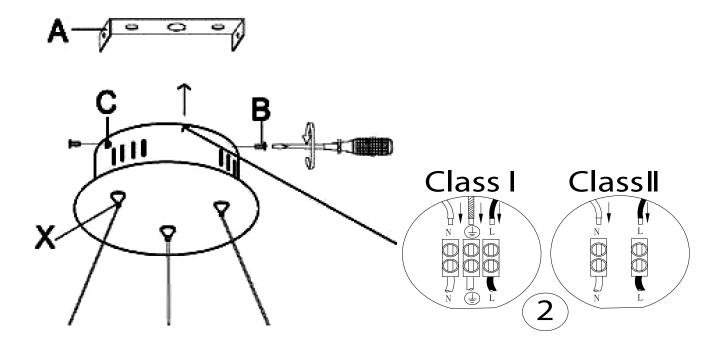





FR Scannez le code QR pour plusieurs langues

Escanee el código QR para varios idiomas

Zeskanuj kod QR dla wielu języków

© Scannen Sie den QR-Code nach mehreren Sprachen

Scansiona il codice QR per multilingua

